

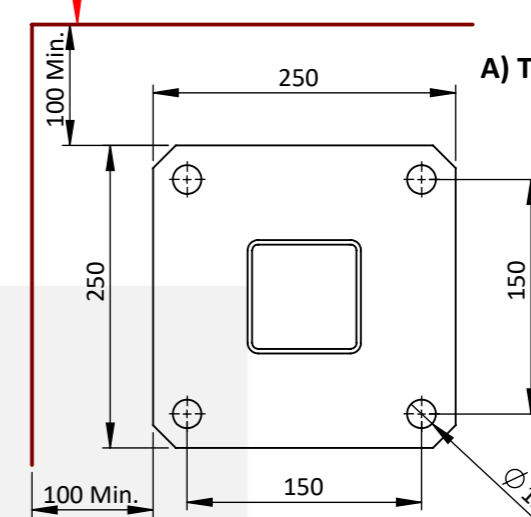



Concrete Edge (Min.20MPa Concrete Substrate)

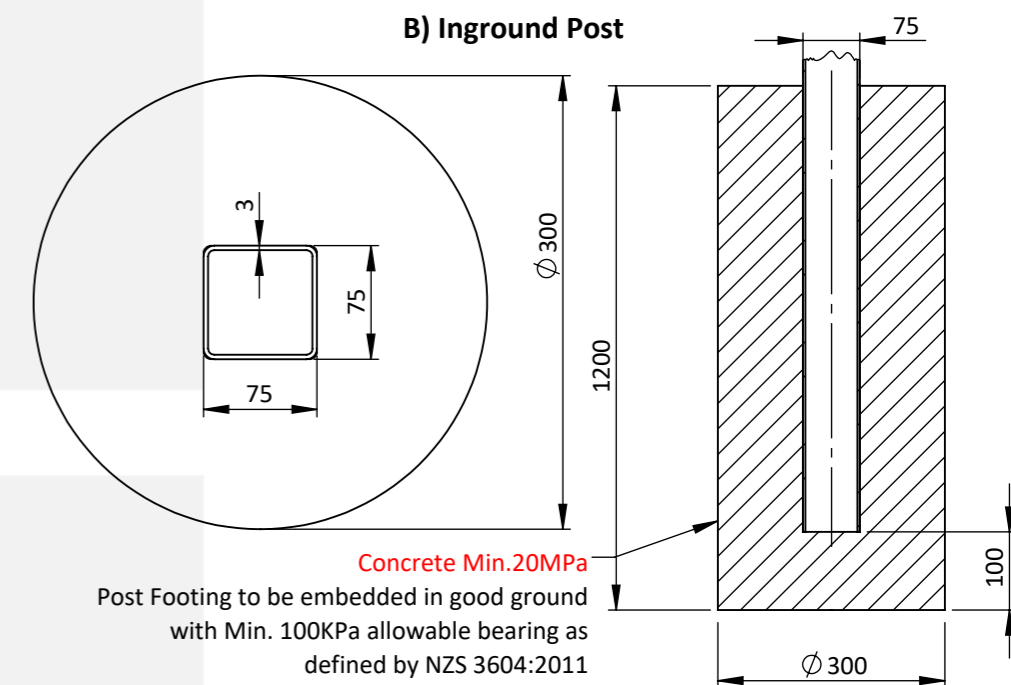

A) Top Mount Post

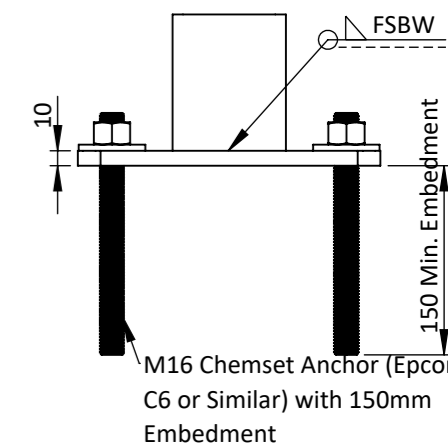

B) Inground Post

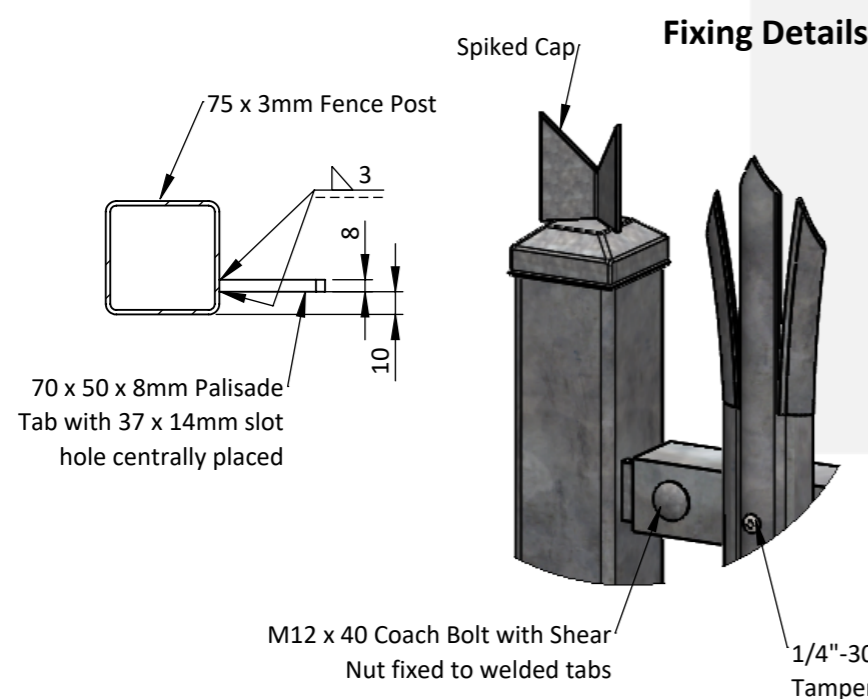

Fixing Details

Spike Options




Trident Top



Spear Top



Flat Top

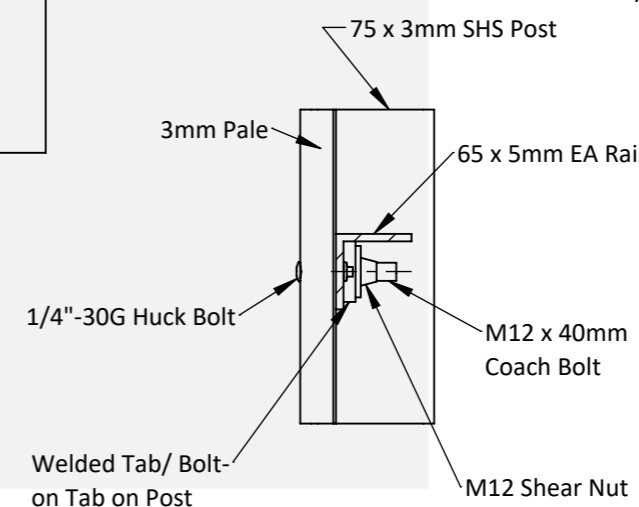

Specs :

- Rails 65 x 5mm EA
- Posts 75 x 3mm
- D-Pales 80 x 3mm Hot Rolled Coil & Cold Roll Formed Profile
- Upto 45 Degree Rake

Description :

ArmourFence™ Palisade 1800h  
PS1 Compliant to NZBC B1 & F4

Material :

- Posts: Black Steel to AS/NZS 1163 Grade C350
- Angles: Black Steel to AS/NZS 3679/300 PLUS
- Baseplates: Black Steel to AS/NZS 3679/300 PLUS
- D-Pales : Black Steel to AS/NZS 1594:2002 HA250
- Steel Tabs : Black Steel to AS/NZS 3679/300 PLUS

Finish :

Hot Dip Galvanised to AS/NZS 4680:2006

Panel Weight : 75 Kg




Drawn : KSB

Notes :

- Footing dimensions subject to change to suit ground conditions
- High Security Product
- Powder Coated Finish Available
- Fence is designed to maximum high wind zone

Version: 5

Date: 23/02/2024

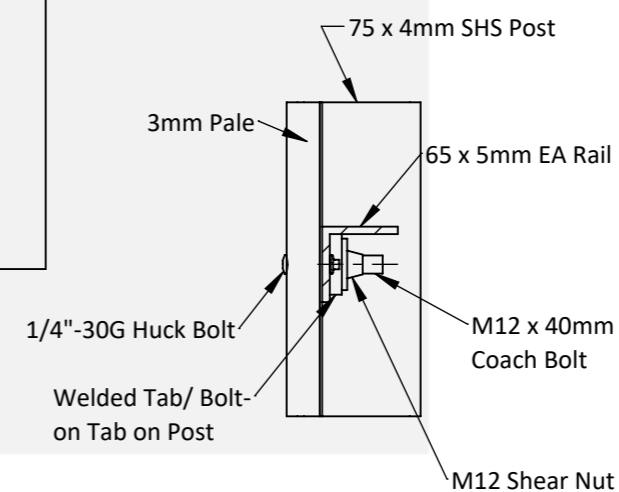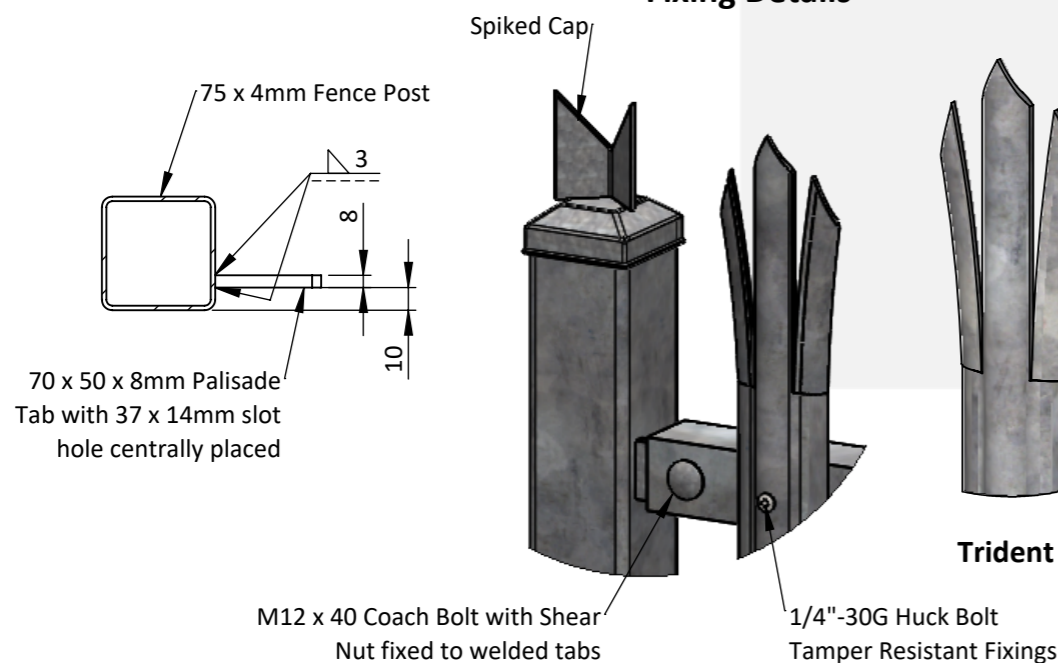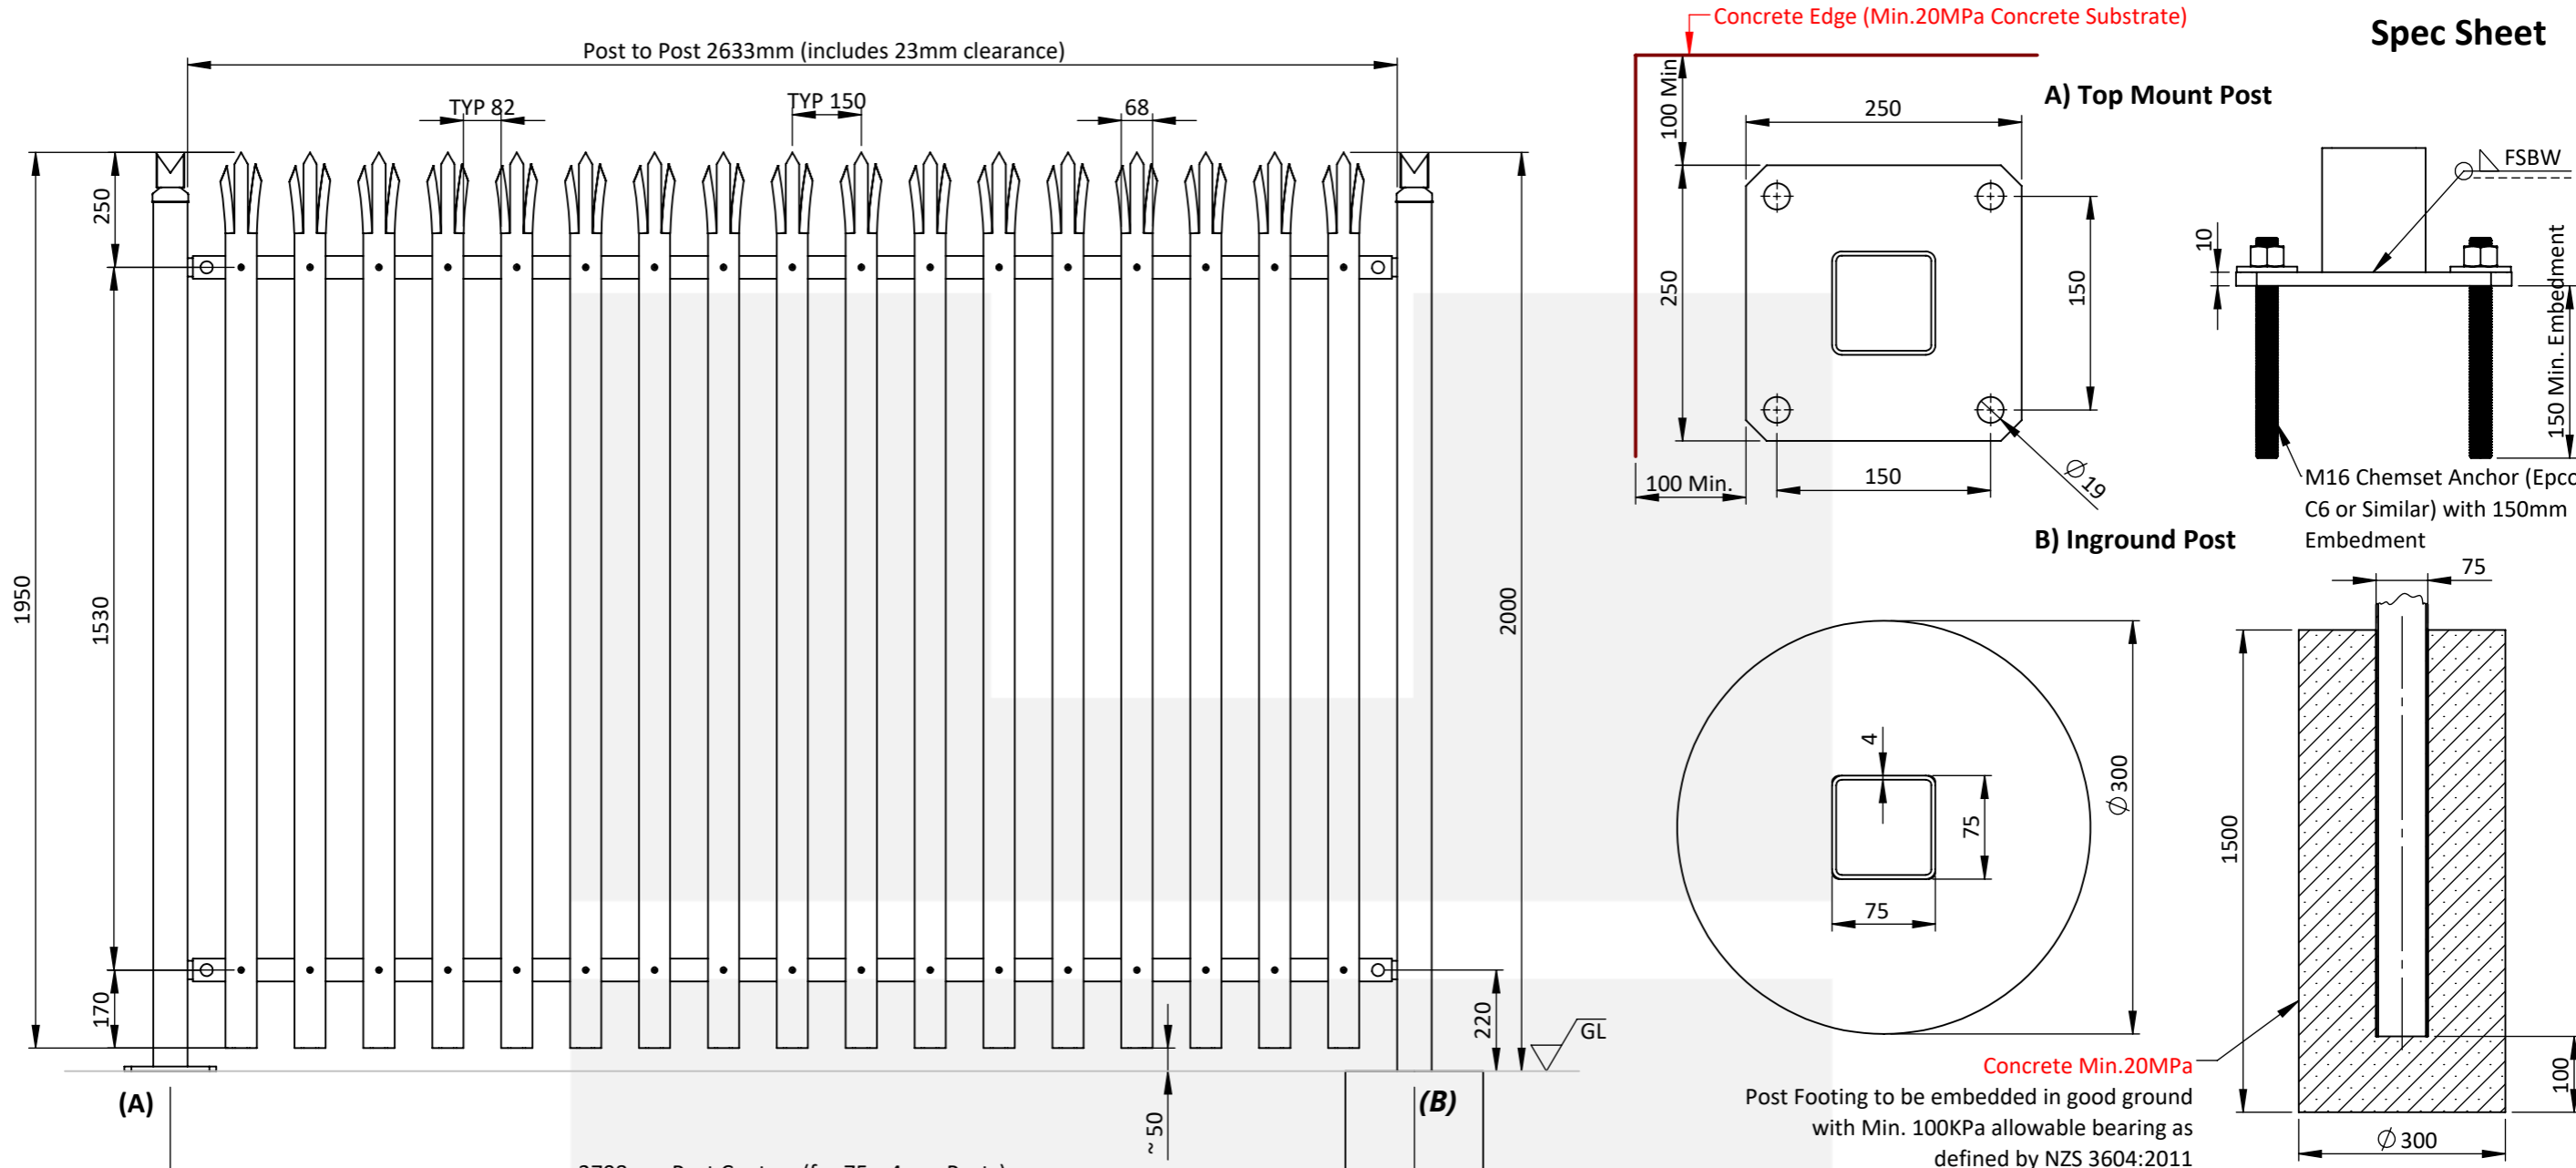

ArmourFence™ Palisade 2000h  
PS1 Compliant to NZBC B1 & F4

- Posts: Black Steel to AS/NZS 1163 Grade C350
- Angles: Black Steel to AS/NZS 3679/300 PLUS
- Baseplates: Black Steel to AS/NZS 3679/300 PLUS
- D-Pales : Black Steel to AS/NZS 1594:2002 HA250
- Steel Tabs : Black Steel to AS/NZS 3679/300 PLUS





Hot Dip Galvanised to AS/NZS 4680:2006

<b>Panel Weight :</b>	82 Kg	<b>Drawn :</b>	KSB
-----------------------	-------	----------------	-----

- Footing dimensions subject to change to suit ground conditions
- High Security Product
- Powder Coated Finish Available
- Fence is designed to maximum high wind zone

<b>Version:</b>	5	<b>Date:</b>	23/02/2024
-----------------	---	--------------	------------



- Rails 65 x 5mm EA
- Posts 75 x 4mm
- D-Pales 80 x 3mm Hot Rolled Coil & Cold Roll Formed Profile
- Upto 45 Degree Rake

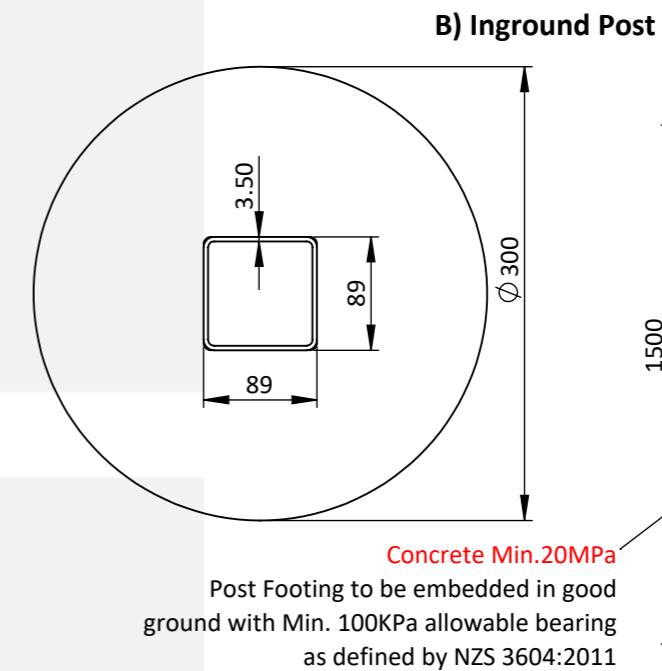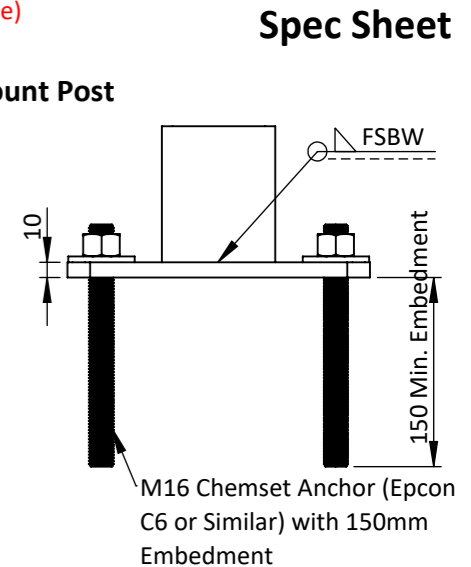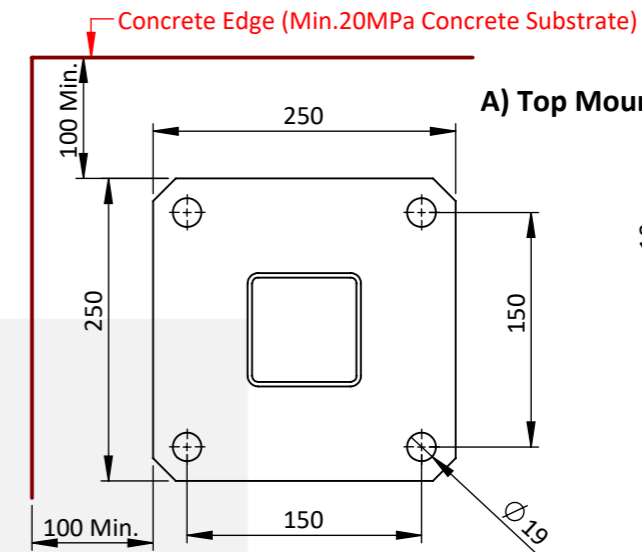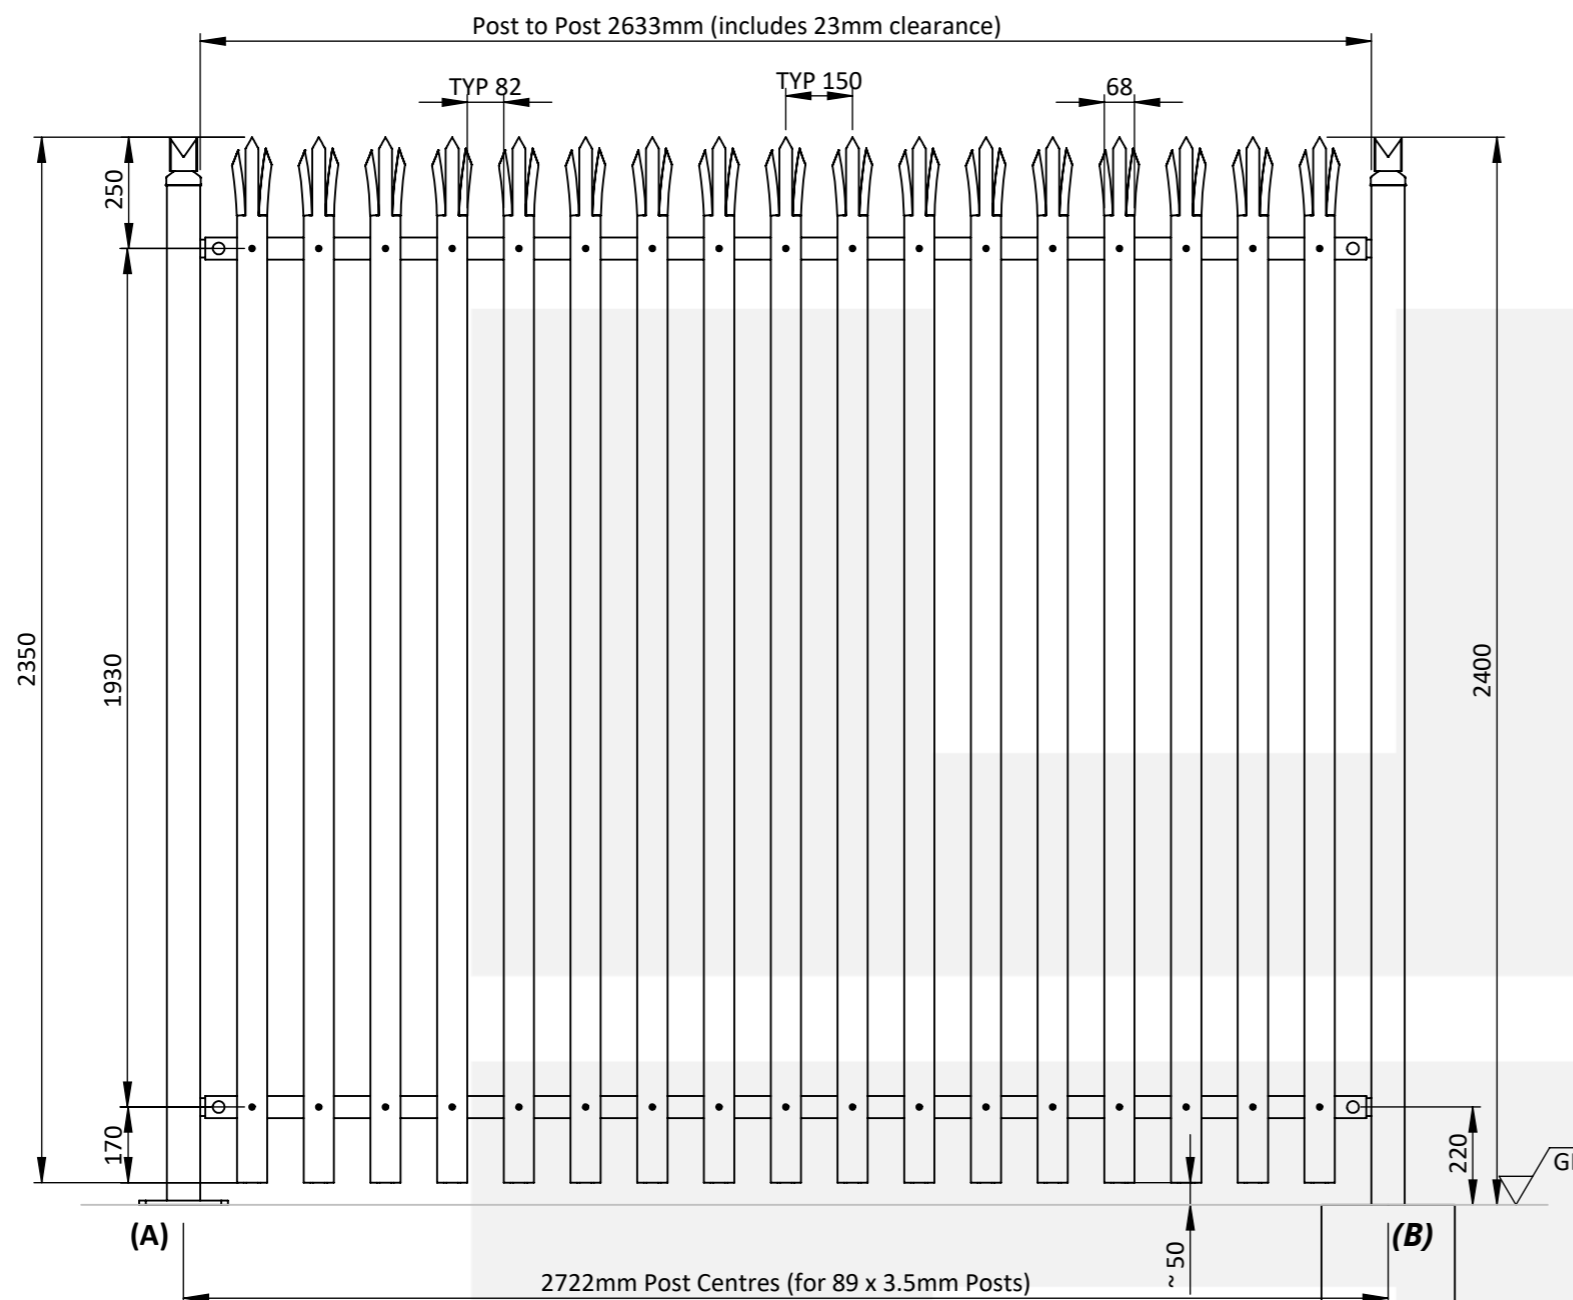

Concrete Min.20MPa  
Post Footing to be embedded in good ground with Min. 100KPa allowable bearing as defined by NZS 3604:2011

### Fixing Details





### Spike Options

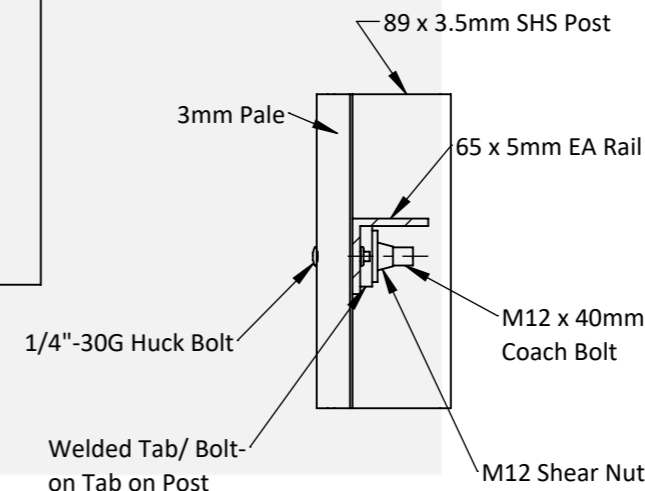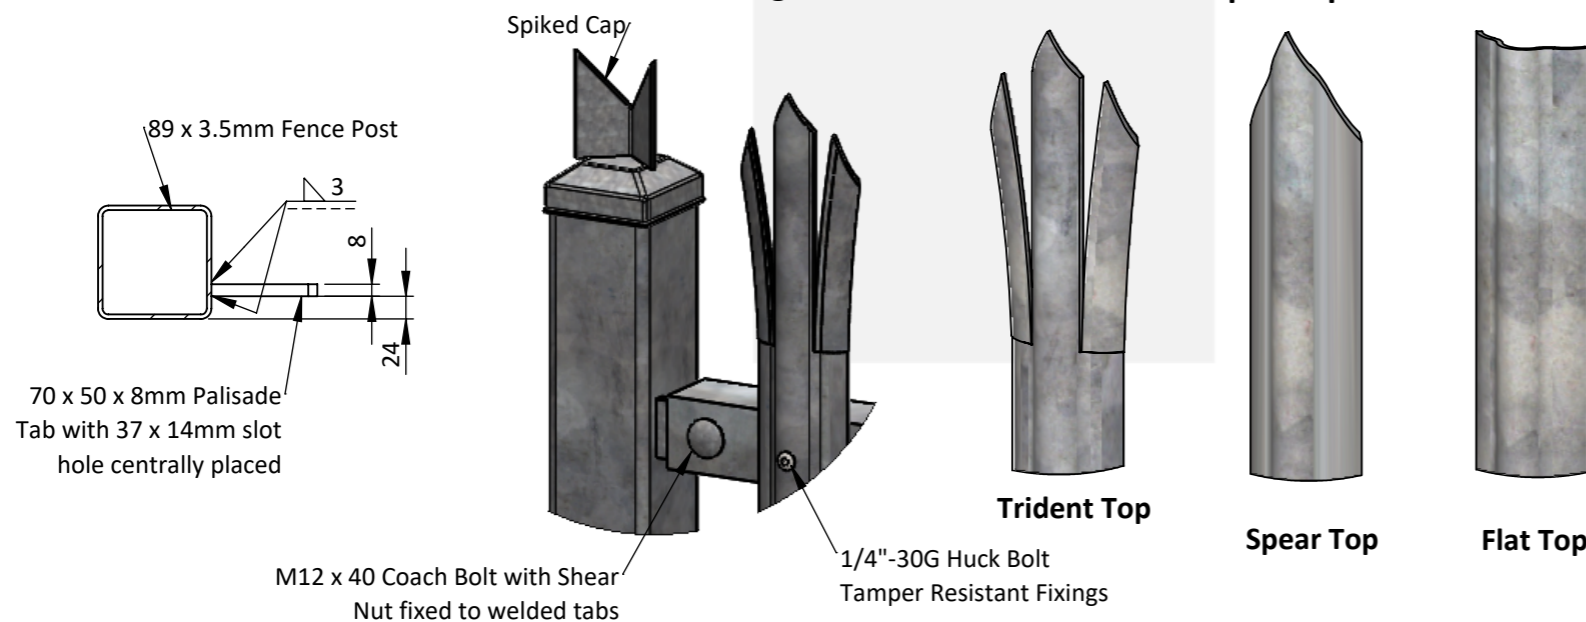

**Specs :**


- Rails 65 x 5mm EA
- Posts 89 x 3.5mm
- D-Pales 80 x 3mm Hot Rolled Coil & Cold Roll Formed Profile
- Upto 45 Degree Rake

<b>Description :</b>	
<b>ArmourFence™ Palisade 2400h</b> PS1 Compliant to NZBC B1 & F4	
<b>Material :</b>	
<ul style="list-style-type: none"><li>• Posts: Black Steel to AS/NZS 1163 Grade C350</li><li>• Angles: Black Steel to AS/NZS 3679/300 PLUS</li><li>• Baseplates: Black Steel to AS/NZS 3679/300 PLUS</li><li>• D-Pales : Black Steel to AS/NZS 1594:2002 HA250</li><li>• Steel Tabs : Black Steel to AS/NZS 3679/300 PLUS</li></ul>	
<b>Finish :</b>	
Hot Dip Galvanised to AS/NZS 4680:2006	
<b>Panel Weight :</b>	95 Kg
<b>Drawn :</b>	KSB
<b>Notes :</b>	
<ul style="list-style-type: none"><li>• Footing dimensions subject to change to suit ground conditions</li><li>• High Security Product</li><li>• Powder Coated Finish Available</li><li>• Fence is designed to maximum high wind zone</li></ul>	
<b>Version:</b>	5
<b>Date:</b>	23/02/2024

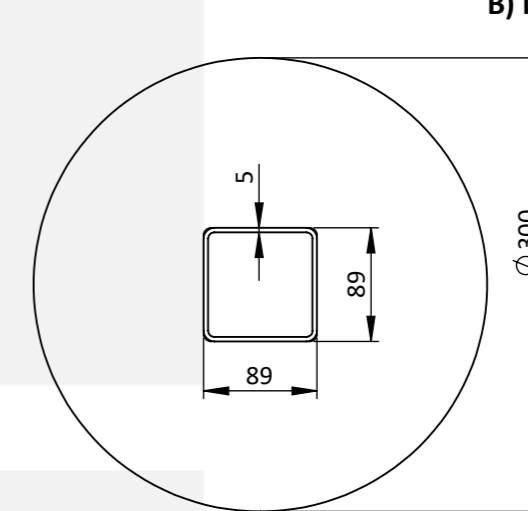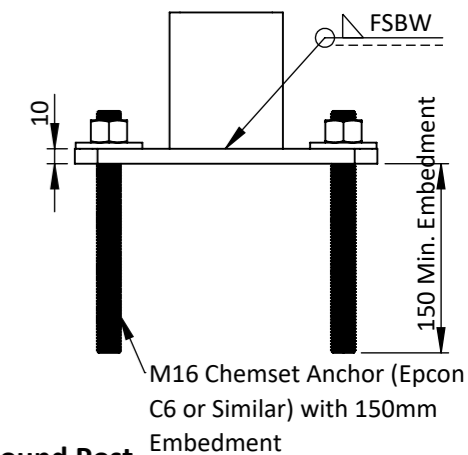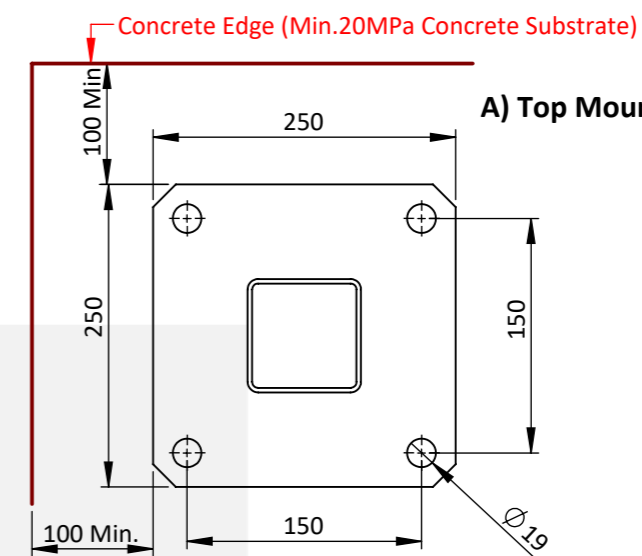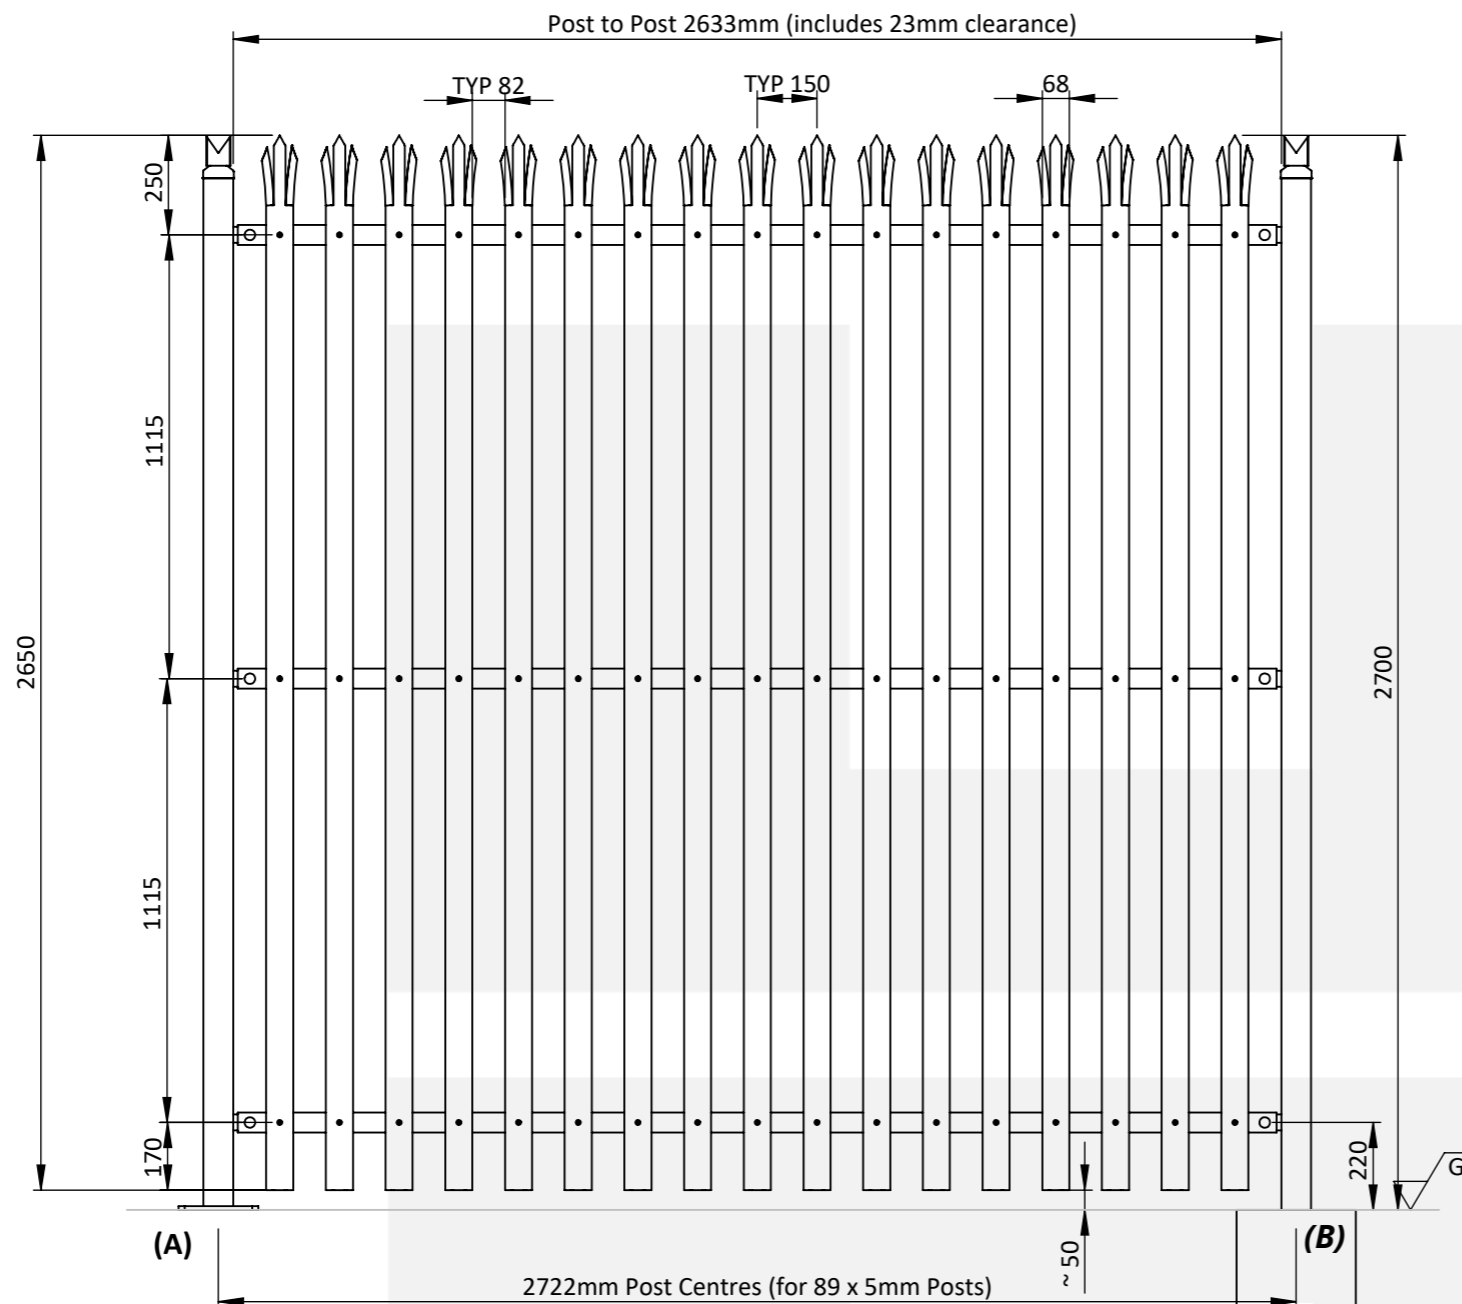


Concrete Min.20MPa



Post Footing to be embedded in good ground with Min. 100KPa allowable bearing as defined by NZS 3604:2011

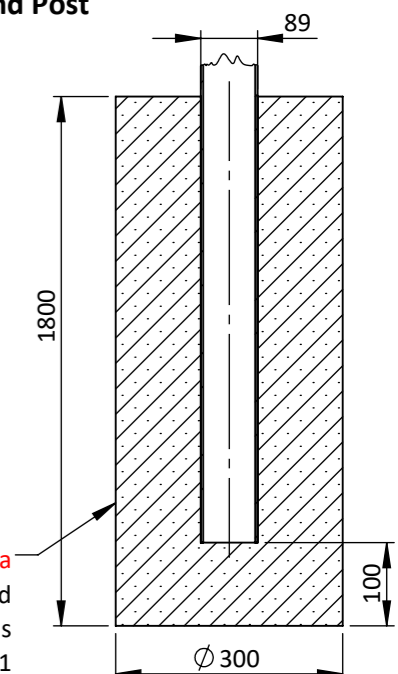

### Fixing Details

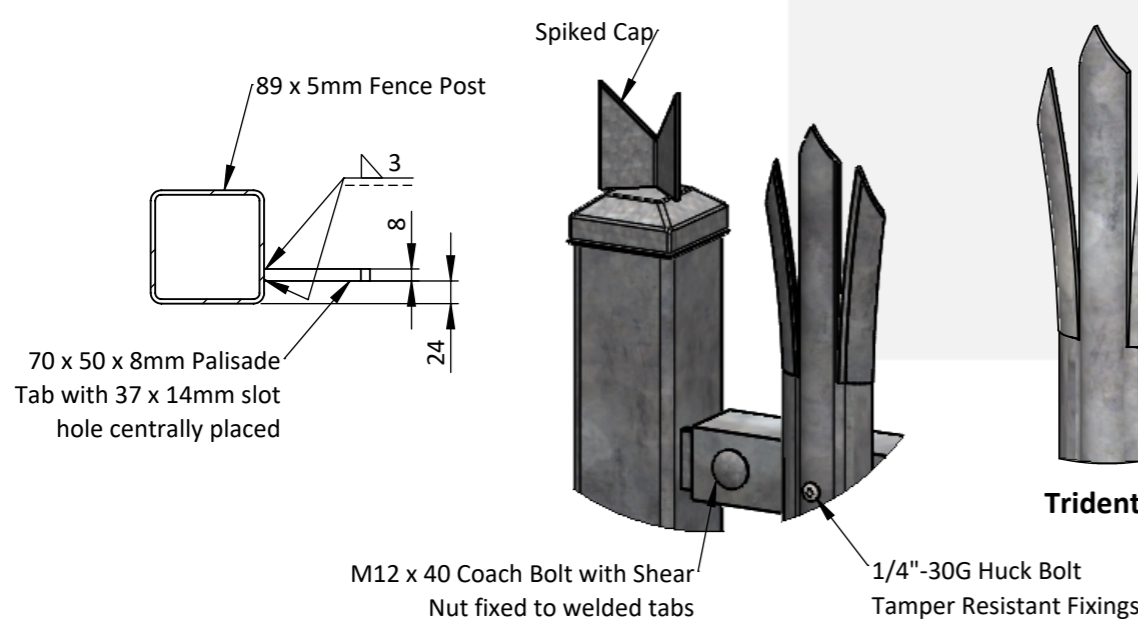

### Spike Options

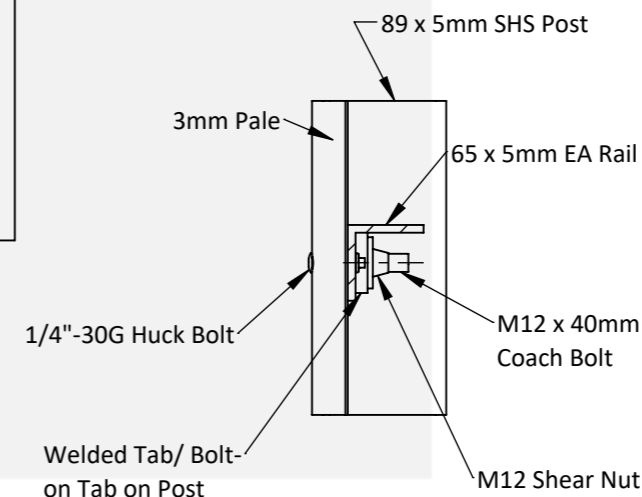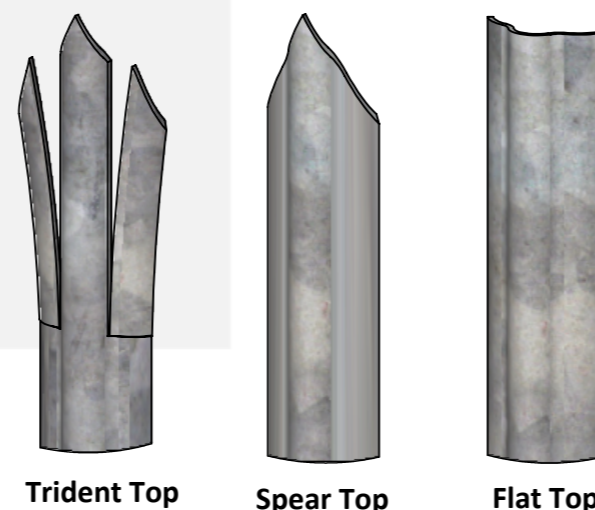

**Specs :**

- Rails 65 x 5mm EA
- Posts 89 x 5mm
- D-Pales 80 x 3mm Hot Rolled Coil & Cold Roll Formed Profile
- Upto 45 Degree Rake

### Description :

**ArmourFence™ Palisade 2700h**  
PS1 Compliant to NZBC B1 & F4

### Material :

- Posts: Black Steel to AS/NZS 1163 Grade C350
- Angles: Black Steel to AS/NZS 3679/300 PLUS
- Baseplates: Black Steel to AS/NZS 3679/300 PLUS
- D-Pales : Black Steel to AS/NZS 1594:2002 HA250
- Steel Tabs : Black Steel to AS/NZS 3679/300 PLUS

### Finish :

Hot Dip Galvanised to AS/NZS 4680:2006

**Panel Weight :** 114 Kg

**Drawn :** KSB






### Notes :

- Footing dimensions subject to change to suit ground conditions
- High Security Product
- Powder Coated Finish Available
- Fence is designed to maximum high wind zone

**Version:** 5

**Date:** 23/02/2024



Page: 4 of 5

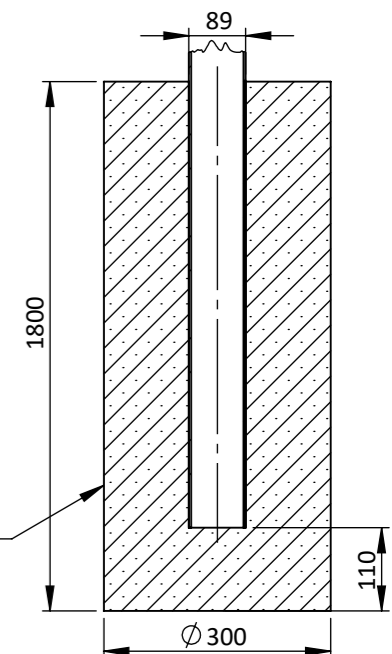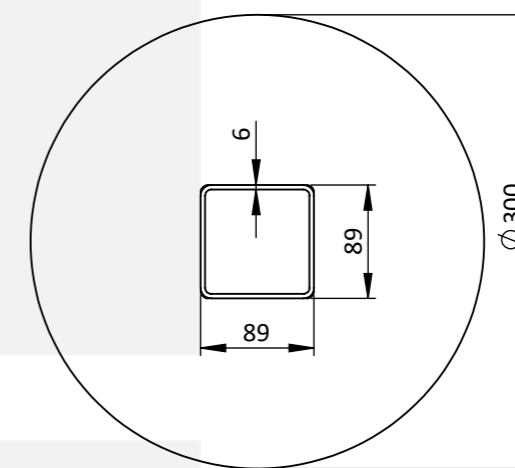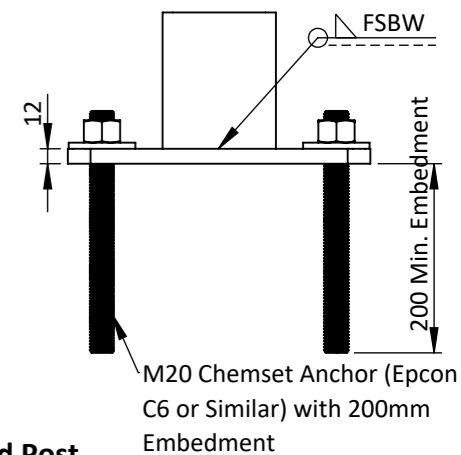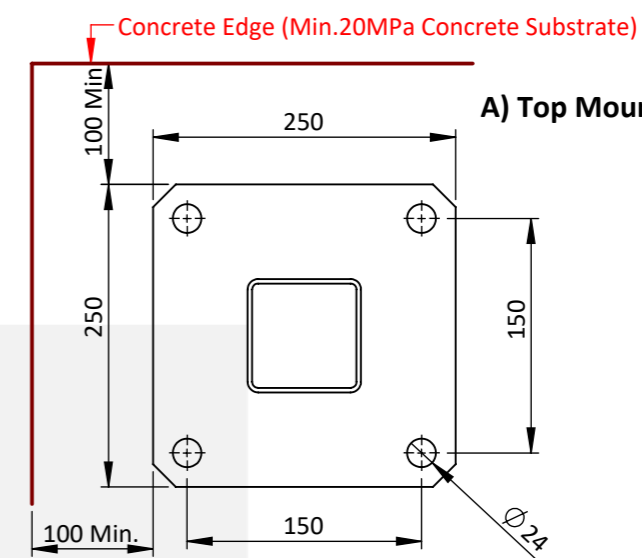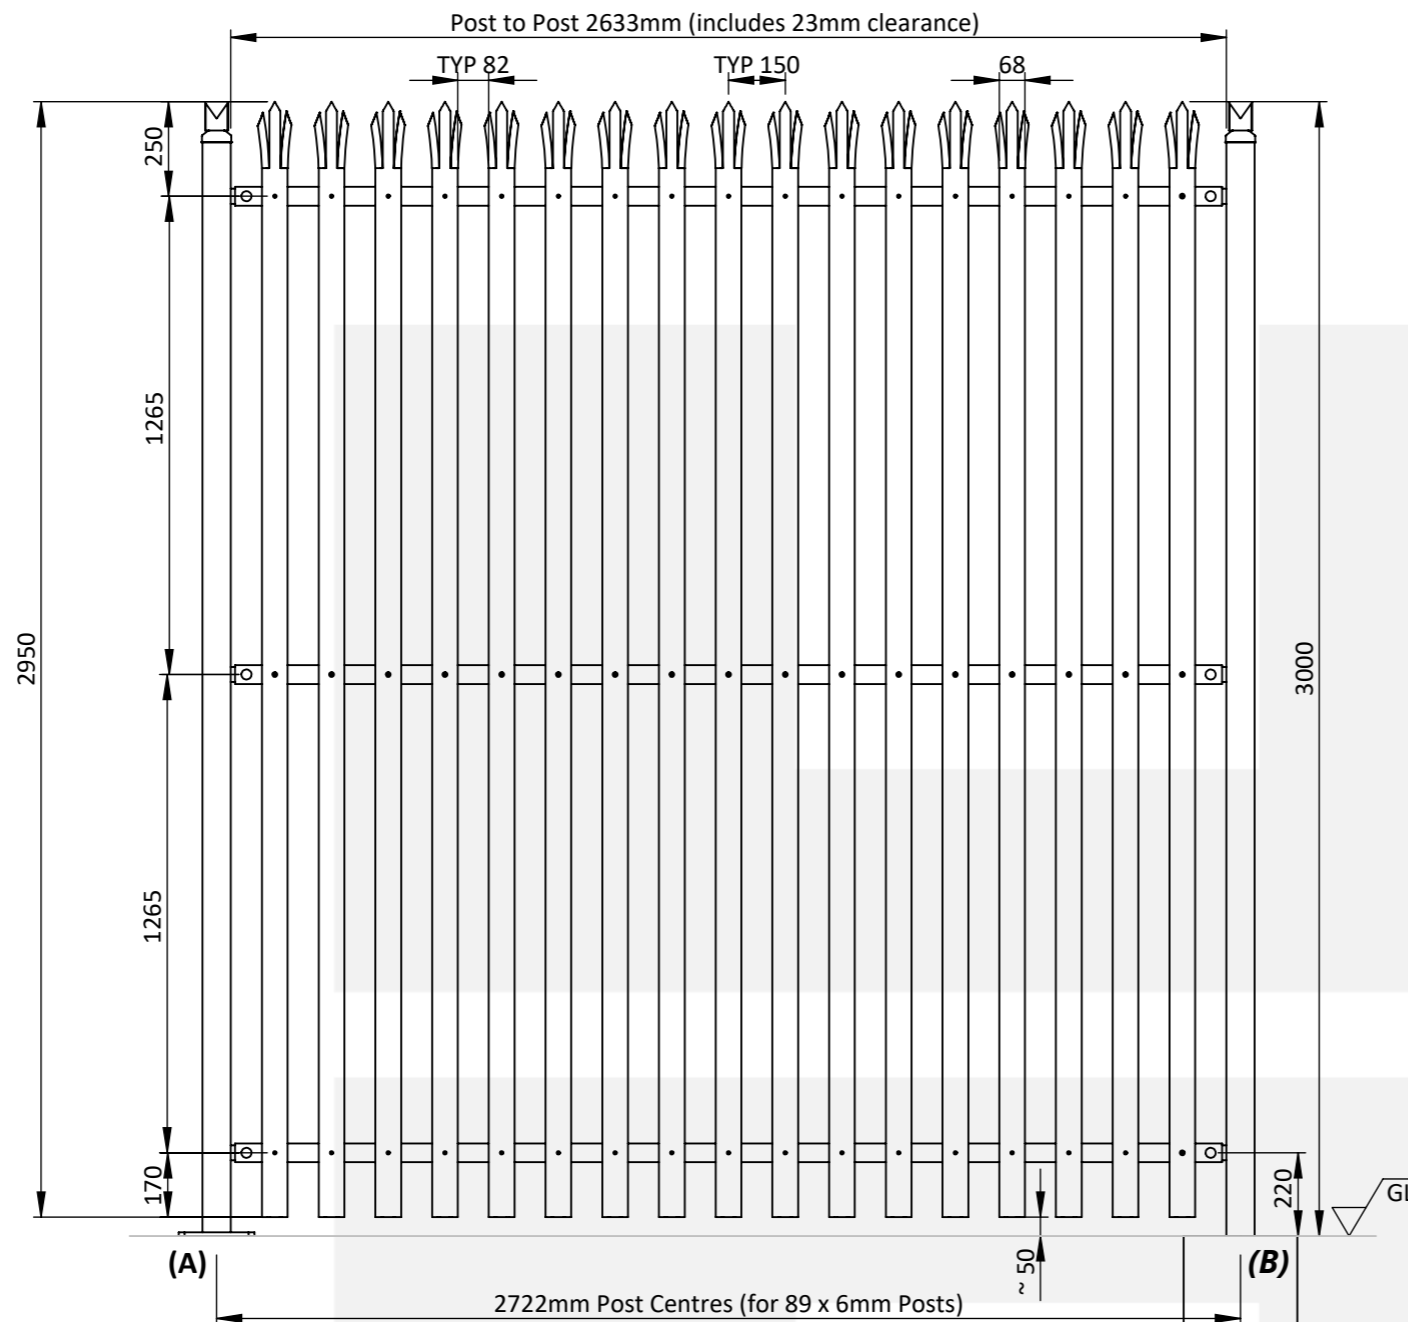

Concrete Min. 20MPa  
Post Footing to be embedded in good ground with Min. 100KPa allowable bearing as defined by NZS 3604:2011

### Fixing Details

### Spike Options

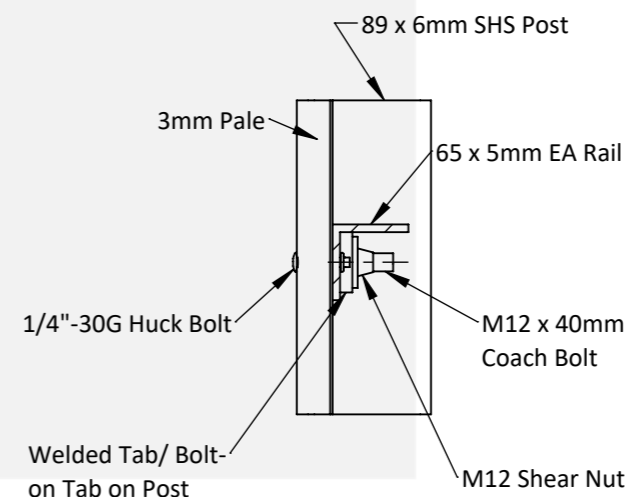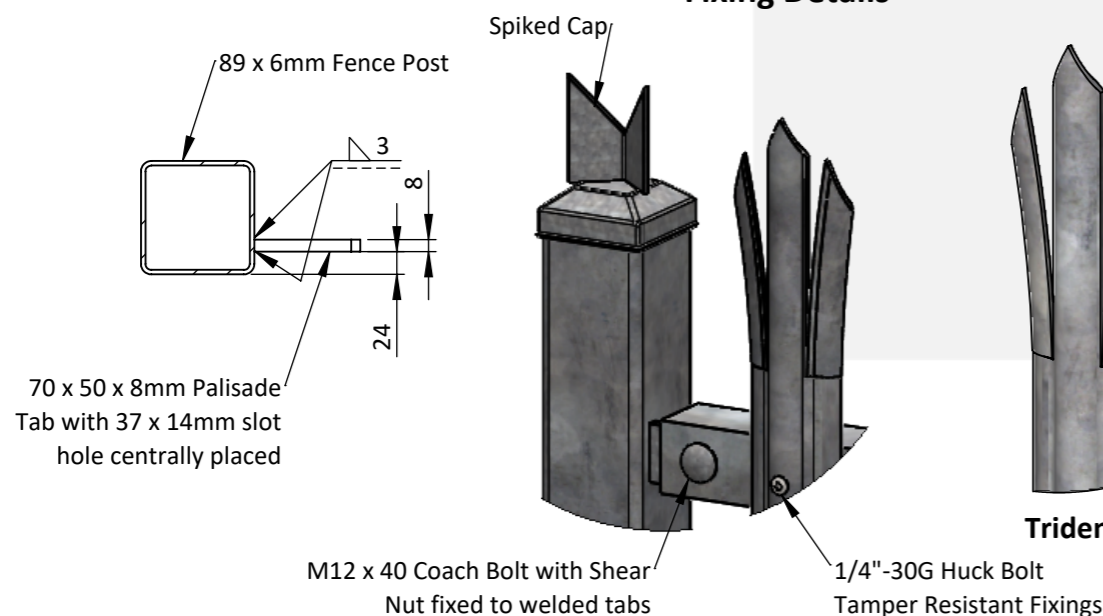

**Specs :**

- Rails 65 x 5mm EA
- Posts 89 x 6mm
- D-Pales 80 x 3mm Hot Rolled Coil & Cold Roll Formed Profile
- Upto 45 Degree Rake

### Description :

**ArmourFence™ Palisade 3000h**  
PS1 Compliant to NZBC B1 & F4

### Material :

- Posts: Black Steel to AS/NZS 1163 Grade C350
- Angles: Black Steel to AS/NZS 3679/300 PLUS
- Baseplates: Black Steel to AS/NZS 3679/300 PLUS
- D-Pales : Black Steel to AS/NZS 1594:2002 HA250
- Steel Tabs : Black Steel to AS/NZS 3679/300 PLUS

### Finish :

Hot Dip Galvanised to AS/NZS 4680:2006

**Panel Weight :** 124 Kg

**Drawn :** KSB

### Notes :

- Footing dimensions subject to change to suit ground conditions
- High Security Product
- Powder Coated Finish Available
- Fence is designed to maximum high wind zone

**Version:** 4

**Date:** 23/02/2024